


TechnoFix™SE

Epoxy Injectable Anchoring Adhesive

PRODUCT DESCRIPTION

TechnoFix™SE is a two-component (resin and hardener) epoxy-based anchor which are combined and dispensed through the attached mixing nozzle. TechnoFix™SE is qualified to bond threaded rod and rebar into drilled holes in an assortment of base materials for both structural and non-structural applications.

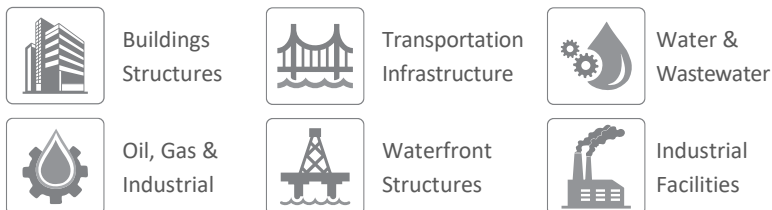

TECHNICAL DATA

	Unit	TechnoFix™SE
Compressive Strength (7 days)	MPa	>90
Bond Strength (7 days)	MPa	16
Substrate temperature	°C	+5 to +40
Ambient temperature	°C	+5 to +40

PHYSICAL PROPERTIES

Color	Gray	
Chemical Base	Epoxy Resin	
Mixing Ratio	by volume	2:1
Volume solid	100%	
Density	gr/cm ³	1.4

ADVANTAGES

- Pre-cured and no onsite impregnation product.
- Easy hole-cleaning procedure — no power-brushing required
- Qualified to securely anchor threaded rod and rebar in an assortment of base materials (concrete & masonry) for both structural and non-structural applications.
- Suitable for use in damp or wet anchor sites.

TYPICAL USES

- Threaded rod anchoring and rebar doweling into concrete, masonry and URM (red brick)
- Pick-proof sealant around doors, windows and fixtures
- Paste-over for crack injection preparation
- Bonding hardened concrete to hardened concrete

PACKAGING

Packaging / By Weight:

Component A = 10 kg - Component B = 5 kg

Component A = 20 kg - Component B = 10 kg

INSTALLATION PROCEDURE

Drilling and Cleaning

- Using a rotary hammer drill and a bit which is the appropriate size for the anchor diameter to be installed, drill the hole to the specified embedment depth.
- Once the hole is drilled it must be cleaned. All dirt, oil, debris, wax, grease or dust must be removed. This can be done by using a two-step method of blowing out the hole followed by the use of a wire brush to ensure the hole is cleared of all debris.

MIXING

Products These products consist of two parts (resin /hardener). Mix thoroughly by weight or volume in the proportions specified on the product label until uniform in color and consistency. Mix no more material than can be applied within the work time period. Available work time, temperature and complexity of the application will



determine how much material should be mixed at one time

INSTALLATION

Once the hole has been properly prepared, insert the epoxy into the proper dispensing tool.

Begin filling the hole from the bottom with the epoxy until it is about 2/3 of the way full. Begin to slowly insert your threaded rod or rebar into the hole, making sure to turn it to embed it into the epoxy.

Low Allow the adhesive anchor to cure to the specified full curing time prior to applying any load.

Clean up any extra epoxy that may have come out of the hole and the process is complete.

STORAGE

Storage: Store in a cold and dark place, storage temperature: from + 5 ° C up to + 35 ° C.

Shelf Life: 18 months

HANDLING

Before using this product, refer to the Safety Data Sheet (SDS) and label for safe use and handling instructions.

FIRST AID

In case of skin contact, wash thoroughly with soap and water. For eye contact, flush immediately with plenty of water; contact physician immediately. For respiratory problems, remove to fresh air. Wash clothing before reuse.

DISCLAIMER: All guidelines, recommendations, statements, and technical data contained herein are based on information and tests we believe to be reliable and correct, but accuracy and completeness of said tests are not guaranteed and are not to be construed as a warranty, either expressed or implied. It is the user's responsibility to satisfy himself, by his own information and test, to determine suitability of the product for his own intended use, application and job situation and user assumes all risk and liability resulting from his use of the product. We do not suggest or guarantee that any hazard listed herein are the only ones which may exist. Neither seller nor manufacturer shall be liable to the buyer or any third person for any injury, loss or damage directly or indirectly resulting from use of, or inability to use, the product. Recommendations or statements, whether in writing or oral, other than those contained herein shall not be binding upon the manufacturer, unless in writing and signed by a corporate officer of the manufacturer. Technical and application information is provided for the purpose of establishing a general profile of the material and proper application procedures. Test performance results were obtained in a controlled environment and Technopol products makes no claim that these tests or any other tests, accurately represent all environments.